


# Rigitone® Edge Activ'Air® 8/18 Q

- > Square perforations arranged regularly across the whole surface
- > Excellent acoustic absorption
- > Improves the quality of internal air through Activ'Air® exclusive technology
- > Easy to install thanks to the chamfered edge

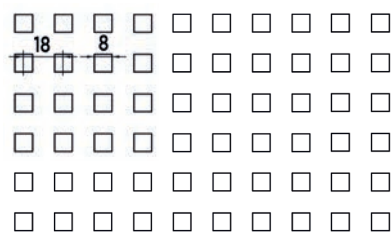

in mm

<b>Material</b>	gypsum
<b>Acoustic tissue</b>	black*
<b>Edge type</b>	chamfered (sanded and primed)
<b>Surface</b>	ready for painting
<b>Format (mm)</b>	1188 x 1998
<b>Thickness (in mm)</b>	12.5
<b>Approx weight. (kg/sq)</b>	10
<b>Perforation (mm)</b>	8 x 8 mm - cent. dist. = 18 mm
<b>Perforation rate</b>	19.8%

\* White acoustic tissue on demand / Without acoustic tissue on demand.



[www.placo.fr](http://www.placo.fr)





# Rigitone® Edge Activ'Air® 8/18 Q



Recycling certified

Sound Absorption

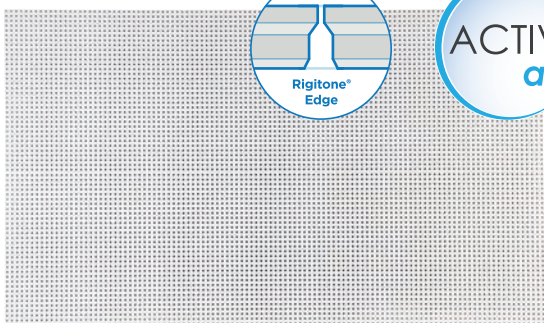


## PERFORMANCES

- Fire reaction:** A2-s1, d0.
- Behaviour in damp environment**  
Rigitone® Edge Activ'Air® panels may be used in rooms with low and medium relative humidity.
- Acoustic behaviour**  
Acoustic absorption (rock wool without vapour barrier).

## STANDARDS

- Rigitone® Edge Activ'Air® panels benefit from A+ classification for Internal Air Quality (Eurofins report in accordance with standards ISO16000).
- Rigitone® Edge Activ'Air® panels comply with standard NF EN 14190.

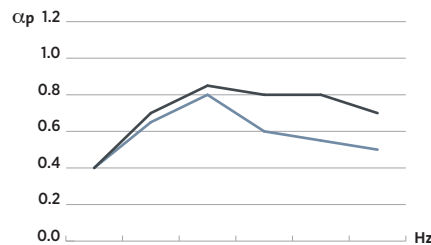

	125	250	500	1000	2000	4000	$\alpha_w$
Plenum 200 mm / Wool 20 mm	0.40	0.70	0.85	0.80	0.80	0.70	0.80
Plenum 200 mm / Without wool	0.40	0.65	0.80	0.60	0.55	0.50	0.60