



Rigitone® Edge Activ'Air® 8/18

- > Round perforations arranged regularly across the whole surface
- > Good acoustic absorption
- > Improves the quality of internal air through Activ'Air® exclusive technology
- > Easy to install thanks to the chamfered edge

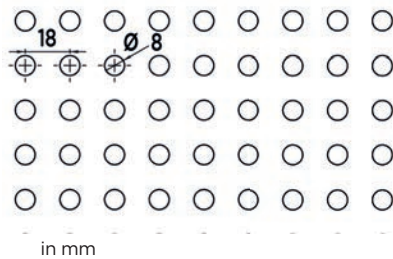

Material	gypsum
Acoustic tissue	black*
Edge type	chamfered (sanded and primed)
Surface	ready for painting
Format (mm)	1188 x 1998
Thickness (in mm)	12.5
Approx weight. (kg/sq)	10
Perforation (mm)	ø = 8 - cent. dist. = 18
Perforation rate	15.5%

* White acoustic tissue on demand / Without acoustic tissue on demand.


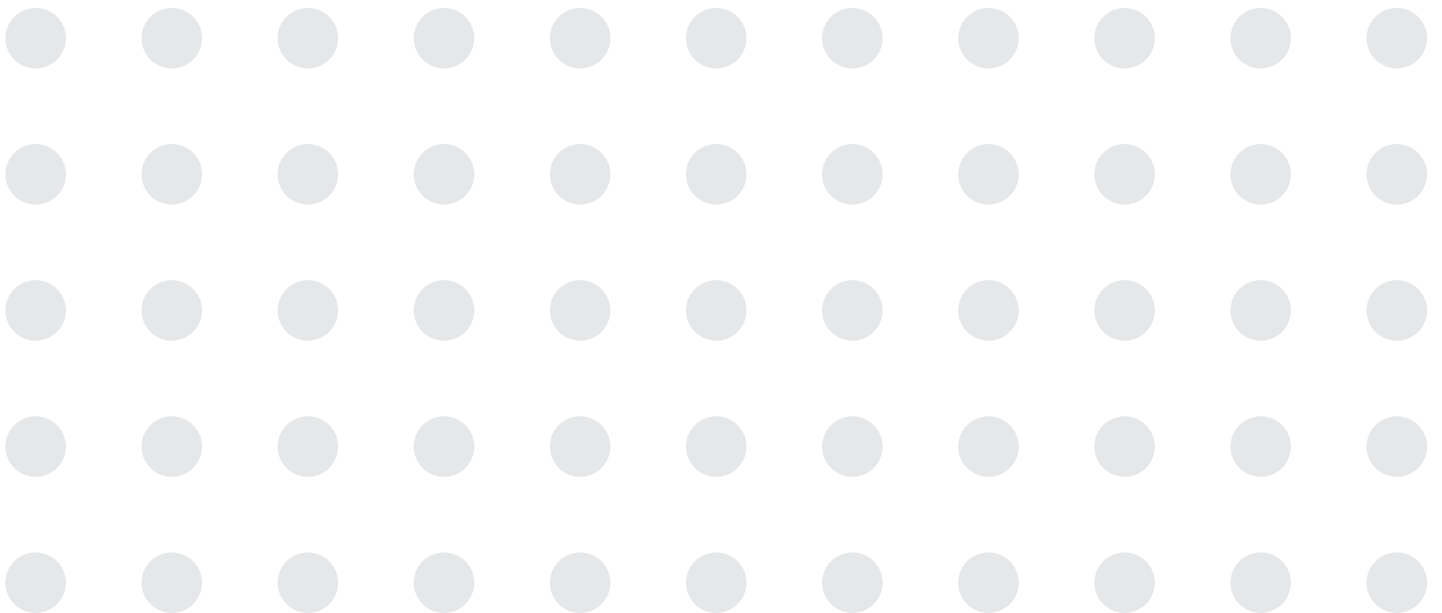


Rigitone® Edge Activ'Air® 8/18



Recycling certified

Sound Absorption

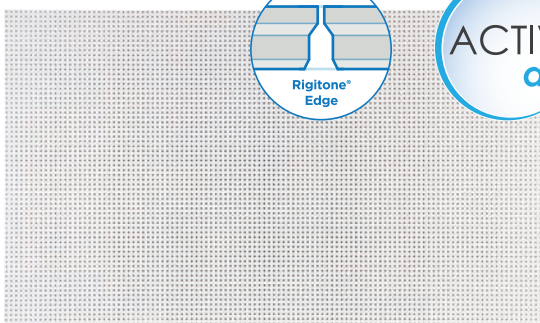


PERFORMANCES

- Fire reaction:** A2-s1, d0.
- Behaviour in damp environment**
Rigitone® Edge Activ'Air® panels may be used in rooms with low and medium relative humidity.
- Acoustic behaviour**
Acoustic absorption (rock wool without vapour barrier).

STANDARDS

- Rigitone® Edge Activ'Air® panels benefit from A+ classification for Internal Air Quality (Eurofins report in accordance with standards ISO16000).
- Rigitone® Edge Activ'Air® panels comply with standard NF EN 14190.

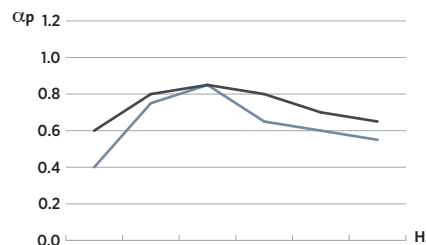

	125	250	500	1000	2000	4000	α_w
Plenum 200 mm / Wool 60 mm	0.60	0.80	0.85	0.80	0.70	0.65	0.75 (L)
Plenum 200 mm / Without wool	0.40	0.75	0.85	0.65	0.60	0.55	0.65 (L)