

# Glasroc® X

## Sealing Tape White

Sealing tape for lightweight façade systems



### Description:

Glasroc® X Sealing Tape White is a self-adhesive high performance sealing tape specially designed for the joint treatment of Glasroc® X façade systems with direct render finishing.

The tape can be plastered and painted over. Glasroc® X Sealing Tape White is also applicable on cement boards in façade systems.

### Composition:

Glasroc® X Sealing Tape White is done with several layers of polymers with a special reinforcement.

Adhesive based on a special dispersion, pressure-sensitive, with protector.

### Area of application:

Glasroc® X Sealing Tape White can be used in interior and exterior applications.

It is specially designed for façade systems using Glasroc® X or cement board as render board or finishing with tiles or plastering.



#### DAFS


Direct Applied Façade Systems



#### Ventilated Cladding systems



#### Non-ventilated Cladding systems



#### Exterior tiling finishing



#### Exterior ceilings



## PRODUCT INFORMATION


Wide	60 mm
Length	25 m
Color	White with blue printing
Weight	24 g/m (0,61 kg/roll)
Thickness	0,65 mm
Dispenser box	182 x 161 x 74 mm

## TECHNICAL PERFORMANCES

Compatibility with paints	Yes
Compatibility with mortars	Yes
Tensile strength	150 N/50mm (30 N/cm)
Elongation	30%
Fire reaction	Class E (EN 13501)
UV stability	12 months (logo not UV resistant)
Open time	12 months
Water penetration	W1 (EN 13984)
Tightness to drive rain	>1050 Pa (EN 1027)
Water-tightness	Passed (EN 1928)
Air-tightness	an ≤ 0,1 m <sup>3</sup> (EN 1026)
Sd	0,6 to 21 m (EN 12572) moisture variable
Temp. at installation on Glasroc® X	- 10°C to + 45°C (special care below + 5°C)
Temp. at installation on cement boards	- 10°C to + 35°C (special care below + 5°C)
Temp. Resistance	- 40°C to + 80°C

## STORAGE & PACKAGING

Storage life	24 months in original packaging
Storage conditions	Indoor storage, dry (<50% humidity) between + 5°C and + 25°C
Packing Art. Nr. 5200890117	10 rolls per carton box (included dispenser box) 42 box per pallet (420 rolls)

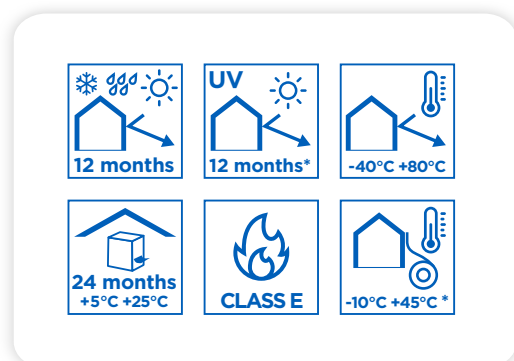

## Installation:

Before installation of the tape, be sure that the joint is dry and free from oil, grease and dust. Remove the protecting film, put it in the right position and press strongly the surface. The tape can be installed at low temperature down to -10°C. However, there should not be separating film, e.g., moisture, ice or hoar frost, on the surface on which the tape is installed. High temperature during installation up to +45°C are allowed when the substrate is Glasroc X or up to +35°C when the substrate is cement board.

## Finishing:

Glasroc® X Sealing Tape White must be finished within twelve months after application. Finishing can be done with mortars, plasters or paints, depending on the use. In façade systems like ETICS/EIFS or ventilated façades with cladding panels, the tape doesn't need to be protected with any specific finishing.

## Health & Environmental:

This tape and its packaging do not contain any substances on the SVHC Candidate List (as of 08.07.2021) according to Art. 59 (1) of the REACH Regulation above 0.1% by mass. Any special labelling is needed.

EMICIDE EC-1<sup>PLUS</sup>

Class A+ in VOC's emission



Cleaning: The skin can be cleaned with soap and water. Residual adhesive can be removed with a solvent-based cleaning agents.

Disposal: Tape remnants can be disposed of with the household waste. Please observe local regulations.

